

You



CUSTOMIZABLE PRESETS

USER-FRIENDLY

Intuitive touch screen display



FRONT LEVER (PADDLE)

Electronically managed to create and modify profiles



ENERGY SAVING SYSTEM

Component insulation and smart electronics for maximum energy efficiency



CONNECTIVITY

USB and Wifi



VOLUMETRIC PUMP

*24V High performance
Excellent stability
during profiling*

MULTI-BOILER

The boilers for both the coffee and the auxiliary services are made from AISI 316 stainless steel, and are fully insulated

FULL CONFIGURATION

Equipped with tank (2,5l) and water mains connection

(*) WiFi module during the year 2023

Characteristics




MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS

Immediate mixing of cold / hot water for a better chemical and organoleptic quality.



AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION

Programmable ON-OFF/ON-ECO timer for each day and/or daily timetables.



STATIC RELAY BOILER TEMPERATURE

Allows to regulate the temperature as accurately as possible.



EASY SERVICE

Fast access to the internal parts for quick and easy technical service.



STAINLESS STEEL COFFEE BOILER

Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone.



AUTOMATIC CLEANING CYCLE

Process for coffee group cleaning.



ENERGY SAVING SYSTEM

Component insulation and smart electronics for maximum energy efficiency.



TEMPCONTROL

For a very-high thermal stability (± 0.2 °C).



GROUP FLUSHING

With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.




VOLUMETRIC PUMP


A new generation of pump to amplifying your experience




Versions



13" / 328 mm

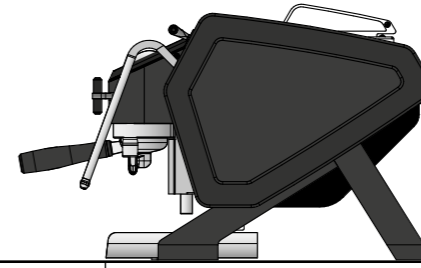

21' 2/3" / 542 mm

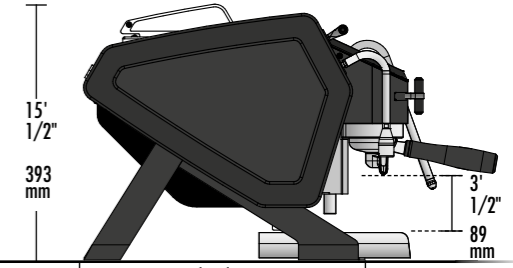


15' 1/2"

393 mm

3' 1/2"

89 mm

16' 2/3" / 422 mm

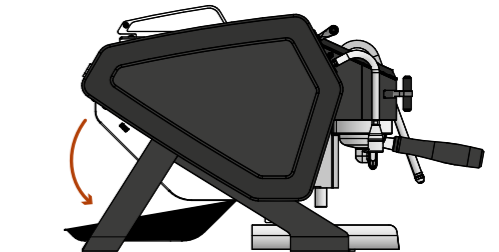

Technical data

voltage/max input boiler	V	220-240V / 50-60HZ / 2.20 kW
		110-120V / 50-60HZ / 1.65 kW
		100V / 50-60HZ / 1.45 kW
coffee boiler's resistor power	W	500
steam boiler capacity	lt	1
coffee boiler capacity	l	0.5
net weight	lb / kg	70.5 / 32
gross weight	lb / kg	79 / 36

Colors

	Black: matt glossy (side frames)	RAL 9005
	White: matt glossy legs and side	RAL 9003 RAL 9005
	White: matt glossy (side frames)	RAL 9003

Customizations available, see YOU_KIT catalogue for more info.



You
Watch the video

Customizable Presets

Extraction profiles customizable and savable:



- 6 standard profiles with optimal parameters presets
- 12 completely customizable profiles in all 3 extraction phases, with a capacity to disable pre-infusion and post-infusion the Paddle
- Set your manual profiles from the Paddle



Electronic Paddle

Manually create your profiles.

Configure the Paddle (right/left) based on your gestures.

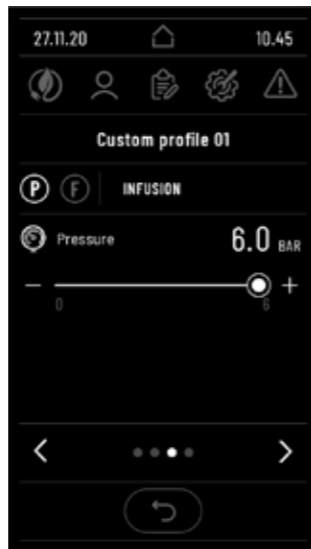



YOU
MADE FOR YOU BY SAHREMO



Extraction mode

Check your extraction in real time verifying pressure flow rate

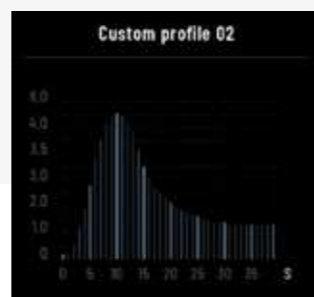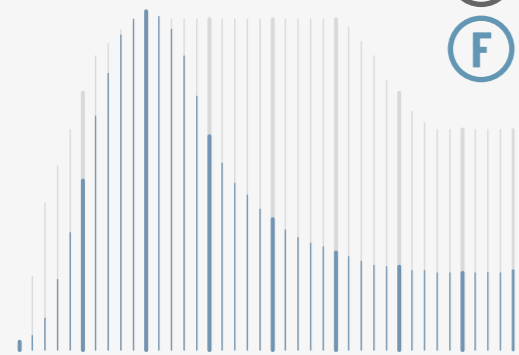

Energy efficiency



Setting:

- **Automatic:** allows the user to associate up to 6 daily time frames.
- **Manual:** allows the user to turn the machine or the individual boilers on and off manually.

Two programmable modes:

- **Stand-by:** low power consumption condition, compliant with the ErP Directive (2009/125/EC).
- **Eco:** keeps the machine on, but at a reduced temperature for quick start-up.

For both, the user can enable the Energy Saving function, which automatically turns the machine off after the set time.

